

Designed for quick lube and wheel service using subfloor pits, the Quick Lube NT mid-rise lift has great flexibility for almost any application. The Nussbaum NT cylinder system allows the lift to be mounted at any width with no need for mechanical ties between platforms, eliminating obstructions in the pit.



Quick Lube NT (optional flush mount shown)



No obstructions, clear floor



Using swing arms to lift SUV on frame

QUICK LUBE NT FEATURES:

- Control station can be mounted in virtually any location with optional hose extensions
- The lowest of cars can access the lift due to the low 4.625" height platforms
- Easily adjustable swing over arms with height extensions allow for lifting vehicles with frame lifting points inside the platform area
- The standard unit supplied with drive on/off ramps for surface mount installation
- Flush mounting eliminates all transitions on and off the lift
- Cylinders are hard and hot chromed for superior service and extended seal life

TECHNICAL DATA*

QUICK LUBE NT	
Lifting Capacity (lbs)	9,000
Lifting Time Approx. (sec)	20
Lifting Height (in)	32.75"
Low Clearance Platform (in)	4.625"
Platform Width (in)	25.625"
Overall Width (in)	Variable
Platform Length (in)	56.125"
Overall Length with Ramps	83.125"
Moto (kW)	1,5
Power Supply (V)	230VAC / 60Hz / 1ph

* All technical data are subject to change.

QUICK LUBE NT


MID-RISE

Quick Lube Bay

Even the lowest of cars can access the lift due to the low 4.625" platform height. The easily adjustable outboard swing arms, that include height extensions, allow for lifting of vehicles whose frame falls inside the platform area. The standard unit surface mounts with drive on/off ramps. The flush mount unit (shown below) eliminates all transitions on and off the lift.



Quick Lube NT standard unit surface mounts with drive on/off ramps

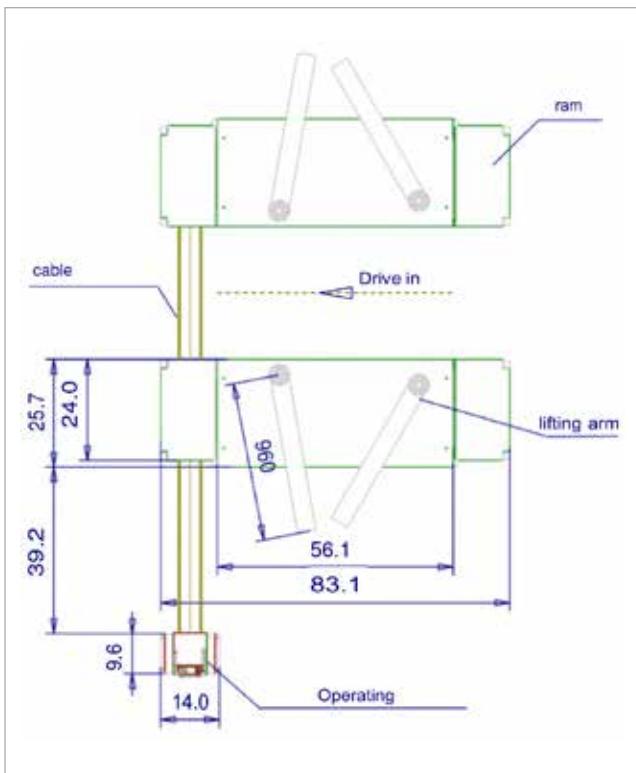

Quick Lube NT Technical Drawings



Quick Lube NT has no mechanical ties between platforms eliminating work obstructions

