

HYDRAULIC 2-POST LIFT

POWER LIFT HDL SST

FOR ALL WEIGHTS AND SIZESWITH
TECHNOLOGY

A WIDE RANGE OF ADVANTAGES

- ✓ OTTO arms for a wide lifting range
- ✓ Security and synchronization with the SST system by NUSSBAUM
- ✓ No overhead or floor plate connections

15000 LBS | 18000 LBS

Made
in
Germany



HYDRAULIC 2-POST LIFT

POWER LIFT HDL SST


The POWER LIFT HDL SST feature NUSSBAUM’s patented SST technology: SST ensures mechanical safety in any lifting height with a safety lock incorporated into the cylinder. With its double-jointed arms and high lifting capacity (15000 lbs or 18000 lbs), it covers a wide lifting range from small cars to medium duty trucks.

Unique construction with double-jointed OTTO arms

- ✓ Lifts all vehicles from short wheelbase cars to medium duty trucks
- ✓ All required pick-up points from car manufacturers can be reached safely

VERSIONS

- **HDL 15 SST**
capacity of 15000 lbs
 - ✓ 2 power and 1 control unit
 - ✓ Double-jointed OTTO arms with mechanical locks
 - ✓ Double-jointed arms (DG) Roller-bearings for comfortable movement
- **HDL 18 SST**
capacity of 18000 lbs
 - ✓ 2 power and 1 control unit 2nd control unit available for greater comfort
 - ✓ Double-jointed arms (DG) Roller-bearings for comfortable movement, with optional pneumatic locking system for optimum safety

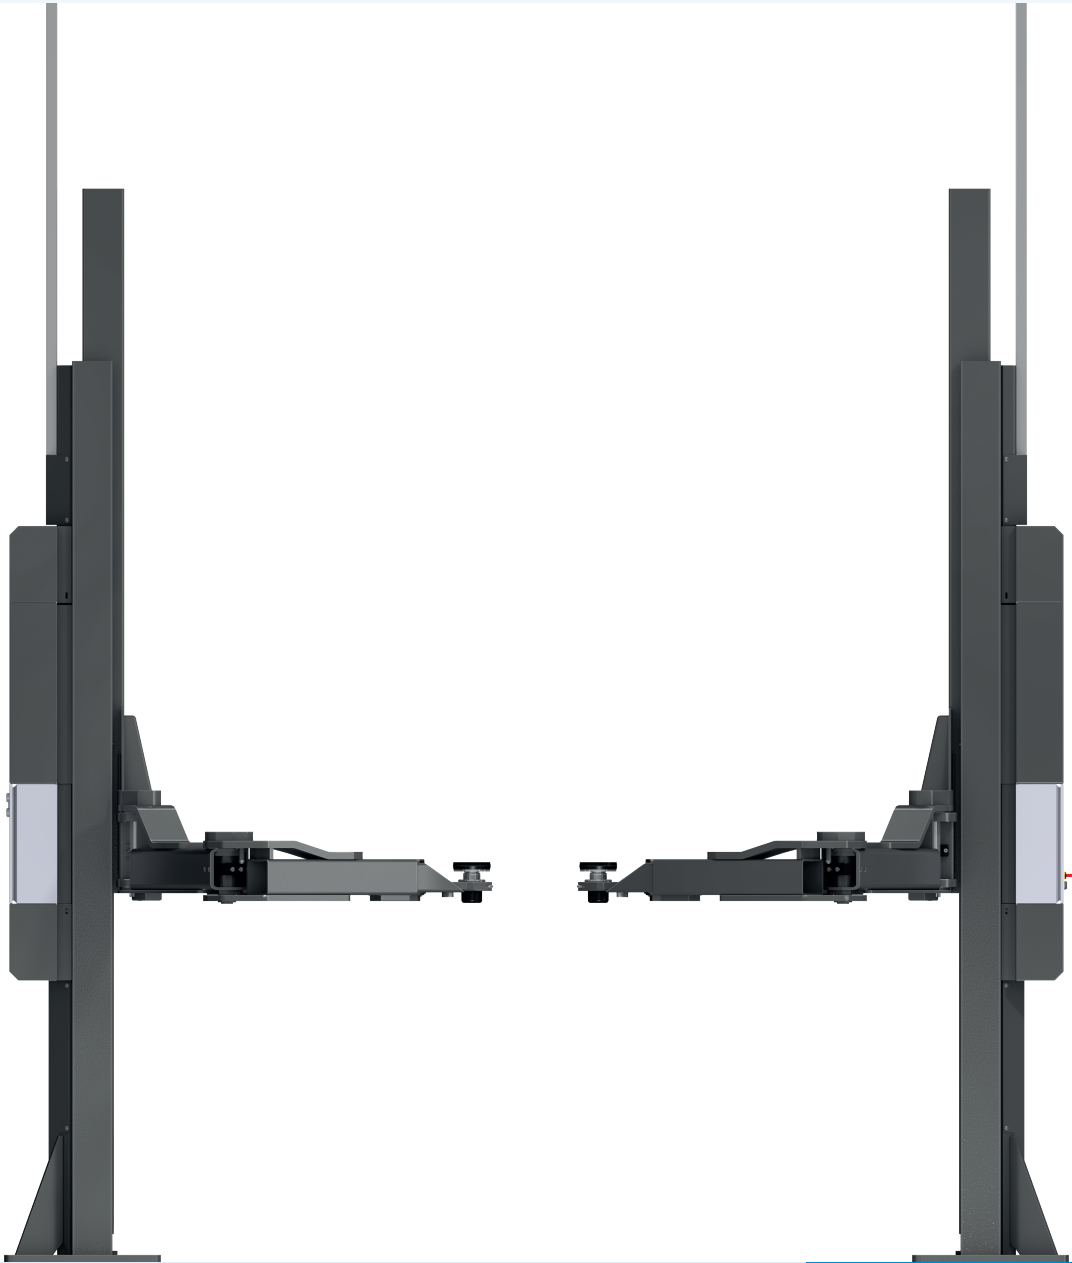

LOW MAINTENANCE & HIGH SAFETY WITH SST

Low maintenance


Virtually wear-free hydraulic cylinders, no equalization cables and no safety lock needed

High safety


Electronic synchronization to 1/16". **Mechanical locking at every height when the lift stops:** A ball bearing lock fits into the cylinder and mechanically locks the lift at every height.



POWER LIFT HDL SST: DETAILS THAT MAKE A DIFFERENCE

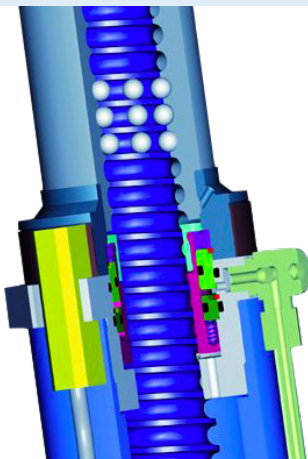

SST stands for SAFETY STAR TECHNOLOGY, a patented NUSSBAUM-technology regulating and monitoring the synchronization of both lift columns to 1/16"

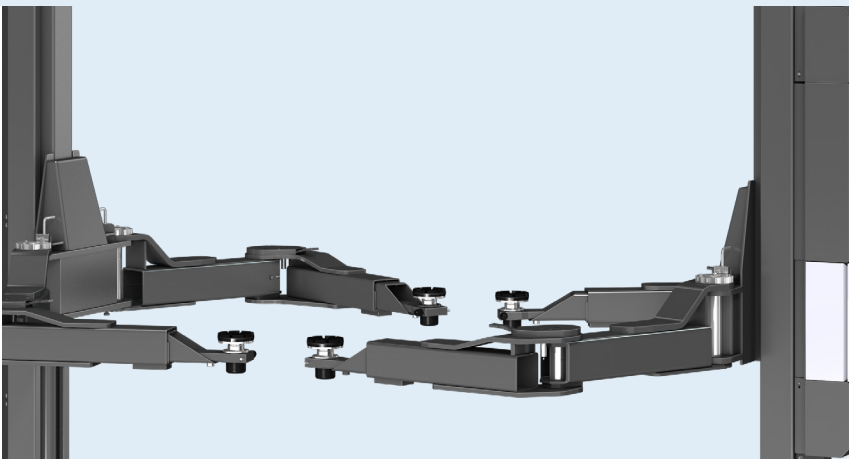

OTTO arms: flexible and user friendly, reaching 100% of pick-up points. Pneumatic arm restraints standard on the HDL 18



The HDL 15 and HDL 18 offer optional 2 control units, one on each side

YOUR MAIN ADVANTAGES

- Adapted for a wide range of vehicles and jobs
- Ease of arm positioning with pneumatic arm restraint system on the HDL 18
- Patented safety with the SST system by NUSSBAUM



CHOOSE YOUR HDL SST

HDL SST	HDL 15 SST	HDL 18 SST
Lifting capacity (lbs)	15000	18000
Lifting height (inch)	82 ¾"	83 ¾"
Lowest lifting point (inch)	4 ¾"	5 ¾"
Total height (inch)	171 ½"-196"	179"-196"
Total width (inch)	140"-148 ½"	140"-148 ½"
Drive-through width (inch)	99 ¼"-107"	99 ¼"-107"
Distance between columns (inch)	109"-117"	109"-117"
Arm extraction (inch) Version DG	0-72"	0-72"
Power supply (V/Ph/Hz/A)	230/1/60/30	230/1/60/30


ACCESSORIES




Height adapter round



Adapter for MERCEDES Sprinter

Adapter U-form for
MERCEDES Sprinter

Mini-Max-Adapter

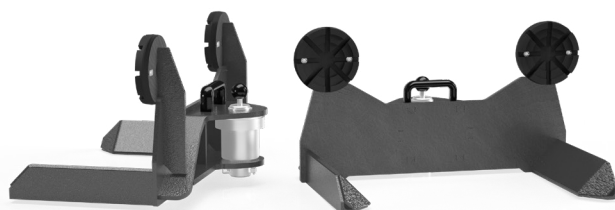

Optional: Wheelfork-Adapter

**More accessories
available**