



MID-RISE SCISSOR LIFT

SPRINTER

FAST AND MOBILE

360°
Access



ADD A WORK BAY WHEREVER, WHENEVER

- ✓ Up and running in seconds
- ✓ No bolts or compressed air needed for installation
- ✓ Covers most of the activities in your workshop


3000 KG

MID-RISE SCISSOR LIFT

SPRINTER

The top mid-rise lift

With a lifting height of 990 mm, the SPRINTER is your best ally for most of your workshop activities. The SPRINTER is easy to install and easy to move. A solid steel construction and a premium quality hydraulic system make it enduring and reliable, ready to lift everything, from very small cars up to off-road vehicles and heavy SUVs.

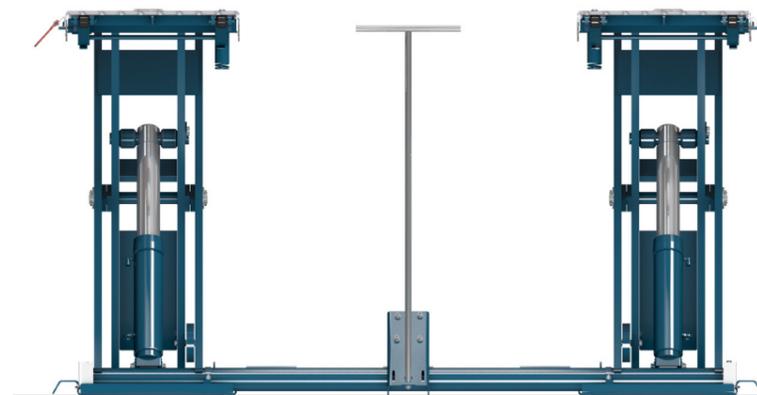

Covers most of your repair shop activities

The SPRINTER is an efficient and mobile solution for tire service, painting, body work and more. **360° access** brings you a vast range of possibilities.

Reliable hydraulic system

The hydraulic system of the lift works with two independent cylinders. The mechanic synchronization is done by torsion bars at the bottom of the lift: No wear, no noise.



- ✓ Can be installed without bolts on almost every flat and solid surface
- ✓ Anti-skid lifting platforms are galvanized and lengthwise adjustable with one hand
- ✓ Solid steel construction

SPRINTER: UP AND RUNNING IN SECONDS



SPRINTER MOBIL 3000 for off-road and SUV vehicles

Flaps to increase the length of the ramps, easy to lock and unlock with one hand

Included: Set of 4 polymer pads (50x150x340 mm)

Optional mobile set to move your lift easily and quickly

THE PLUS FOR YOUR SHOP

- **Flexible**
This lift is easy to move with the optional mobile set
- **Fast and easy to set up²**
We deliver the lift fully assembled after being tested at the factory
- **Fast lifting and lowering times**
The powerful oil submerged motor in the power unit guarantees short lifting and lowering times

1. SPRINTER EXPRESS MOBIL BMW, SPRINTER NT BMW
2. You will need an electric power supply as specified and ca. 12l of hydraulic oil



FAST AND MOBILE

SPRINTER	3000
Lifting capacity (kg)	3000
Lifting/lowering time approx. (sec)	15
Lifting height (mm)	990
Drive-on height (mm)	105
Total width (mm)	1910
Platform width (mm)	450
Platform length (mm)	1400-2010
Motor (kW)	1,5
Power supply (V/Hz)	400/50/16

ACCESSORIES



Fire galvanization of scissors and base plate for corrosive environment



Polymer pads
50 x 150 x 340 mm (included)



Polymer pads
100 x 150 x 340 mm



Pyramid pad



Tuning ramps for low or sports cars, set of 4 units

More accessories available